

VISCON[®] HF

High Flow, High Pressure Fluid Heater

3A2954D

EN

For variable heating of viscous fluids.

Not approved for use in explosive atmospheres or hazardous locations.


7250 psi (50 MPa, 500 bar) Maximum Working Pressure



Important Safety Instructions

Read all warnings and instructions in this manual.
Save these instructions.

See page 2 for model numbers, descriptions, and approvals information.

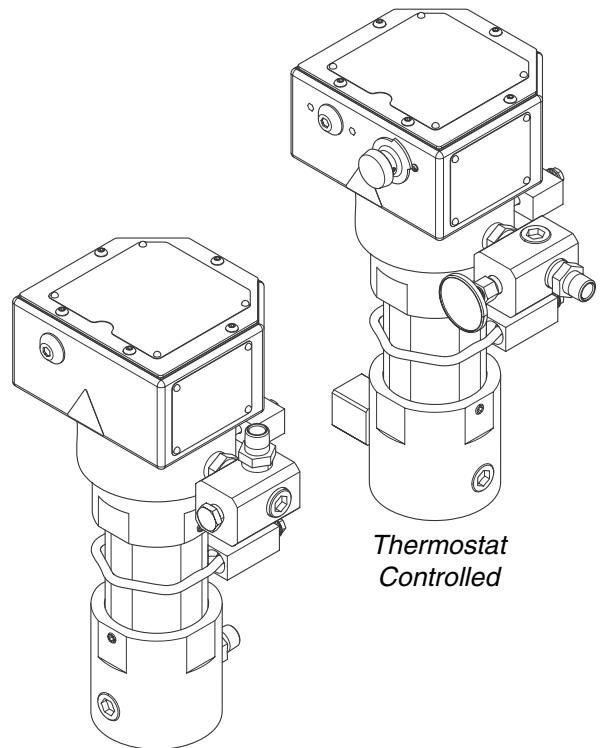

*Externally Controlled, RTD
Feedback Model*

*Thermostat
Controlled*

ti20051a

Contents

Models	2	Troubleshooting	14
Warnings	3	Repair	16
Installation	5	Primary Thermostat & Probe	16
Typical Installation Drawing	5	Overtemperature Switch	16
Component Identification	6	Control Knob	18
General Information	7	Heater Core Removal and Fluid Passage	
Selecting Tubing	7	Unclogging	19
Mounting Heater	8	Heater Cartridges	20
Fluid Connections and Accessories	9	RTD Sensor and Fitting Replacement	21
Electrical Connections	10	Parts	22
RTD Temperature Connection	10	24P016	22
Grounding	10	262853	24
Operation	11	Accessories	26
Pressure Relief Procedure	11	Technical Data	27
Initial Flushing	11	Performance Charts	28
Priming System	11	Dimensions	29
Setting Heater Control	12	Graco Standard Warranty	30
Adjusting for Spraying	12	Graco Information	30
Maintenance	13		
Flushing	13		
Drain the Heater	13		

Models

Model	Series	Description	VAC (50/60 Hz single phase) / Watts / Amps	Approvals
24P016	C	Thermostat Control	240 / 5400 / 22.5	  Intertek 9902471 Conforms to UL Std. 499 CSA Std. 22.2 No. 88
262853	C	RTD, For Use With External Digital Control	240 / 5400 / 22.5	

Warnings

The following warnings are for the setup, use, grounding, maintenance, and repair of this equipment. The exclamation point symbol alerts you to a general warning and the hazard symbols refer to procedure-specific risks. When these symbols appear in the body of this manual or on warning labels, refer back to these Warnings. Product-specific hazard symbols and warnings not covered in this section may appear throughout the body of this manual where applicable.

 WARNING	
	ELECTRIC SHOCK HAZARD This equipment must be grounded. Improper grounding, setup, or usage of the system can cause electric shock. • Turn off and disconnect power at main switch before disconnecting any cables and before servicing or installing equipment. • Connect only to grounded power source. • All electrical wiring must be done by a qualified electrician and comply with all local codes and regulations.
	BURN HAZARD Equipment surfaces and fluid that's heated can become very hot during operation. To avoid severe burns: • Do not touch hot fluid or equipment.
	SKIN INJECTION HAZARD High-pressure fluid from gun, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. Get immediate surgical treatment. • Do not spray without tip guard and trigger guard installed. • Engage trigger lock when not spraying. • Do not point gun at anyone or at any part of the body. • Do not put your hand over the spray tip. • Do not stop or deflect leaks with your hand, body, glove, or rag. • Follow the Pressure Relief Procedure when you stop spraying and before cleaning, checking, or servicing equipment. • Tighten all fluid connections before operating the equipment. • Check hoses and couplings daily. Replace worn or damaged parts immediately.
	FIRE AND EXPLOSION HAZARD Flammable fumes, such as solvent and paint fumes, in work area can ignite or explode. To help prevent fire and explosion: • Use equipment only in well ventilated area. • Eliminate all ignition sources; such as pilot lights, cigarettes, portable electric lamps, and plastic drop cloths (potential static arc). • Keep work area free of debris, including solvent, rags and gasoline. • Do not plug or unplug power cords, or turn power or light switches on or off when flammable fumes are present. • Ground all equipment in the work area. See Grounding instructions. • Use only grounded hoses. • Hold gun firmly to side of grounded pail when triggering into pail. Do not use pail liners unless they are antistatic or conductive. • Stop operation immediately if static sparking occurs or you feel a shock. Do not use equipment until you identify and correct the problem. • Keep a working fire extinguisher in the work area.



WARNING



TOXIC FLUID OR FUMES HAZARD

Toxic fluids or fumes can cause serious injury or death if splashed in the eyes or on skin, inhaled, or swallowed.

- Read MSDSs to know the specific hazards of the fluids you are using.
- Store hazardous fluid in approved containers, and dispose of it according to applicable guidelines.



PERSONAL PROTECTIVE EQUIPMENT

Wear appropriate protective equipment when in the work area to help prevent serious injury, including eye injury, hearing loss, inhalation of toxic fumes, and burns. This protective equipment includes but is not limited to:

- Protective eyewear, and hearing protection.
- Respirators, protective clothing, and gloves as recommended by the fluid and solvent manufacturer



EQUIPMENT MISUSE HAZARD

Misuse can cause death or serious injury.

- Do not operate the unit when fatigued or under the influence of drugs or alcohol.
- Do not exceed the maximum working pressure or temperature rating of the lowest rated system component. See **Technical Data** in all equipment manuals.
- Use fluids and solvents that are compatible with equipment wetted parts. See Technical Data in all equipment manuals. Read fluid and solvent manufacturer's warnings. For complete information about your material, request MSDS from distributor or retailer.
- Do not leave the work area while equipment is energized or under pressure.
- Turn off all equipment and follow the **Pressure Relief Procedure** when equipment is not in use.
- Check equipment daily. Repair or replace worn or damaged parts immediately with genuine manufacturer's replacement parts only.
- Do not alter or modify equipment. Alterations or modifications may void agency approvals and create safety hazards.
- Make sure all equipment is rated and approved for the environment in which you are using it.
- Use equipment only for its intended purpose. Call your distributor for information.
- Route hoses and cables away from traffic areas, sharp edges, moving parts, and hot surfaces.
- Do not kink or over bend hoses or use hoses to pull equipment.
- Keep children and animals away from work area.
- Comply with all applicable safety regulations.



PRESSURIZED ALUMINUM PARTS HAZARD

Use of fluids that are incompatible with aluminum in pressurized equipment can cause serious chemical reaction and equipment rupture. Failure to follow this warning can result in death, serious injury, or property damage.

- Do not use 1,1,1-trichloroethane, methylene chloride, other halogenated hydrocarbon solvents or fluids containing such solvents.
- Many other fluids may contain chemicals that can react with aluminum. Contact your material supplier for compatibility.



THERMAL EXPANSION HAZARD


Fluids subjected to heat in confined spaces, including hoses, can create a rapid rise in pressure due to the thermal expansion. Over-pressurization can result in equipment rupture and serious injury.

- Open a valve to relieve the fluid expansion during heating.
- Replace hoses proactively at regular intervals based on your operating conditions.

Installation

Typical Installation Drawing

The typical installation drawing is only a guide. Your Graco distributor can assist in designing your system.

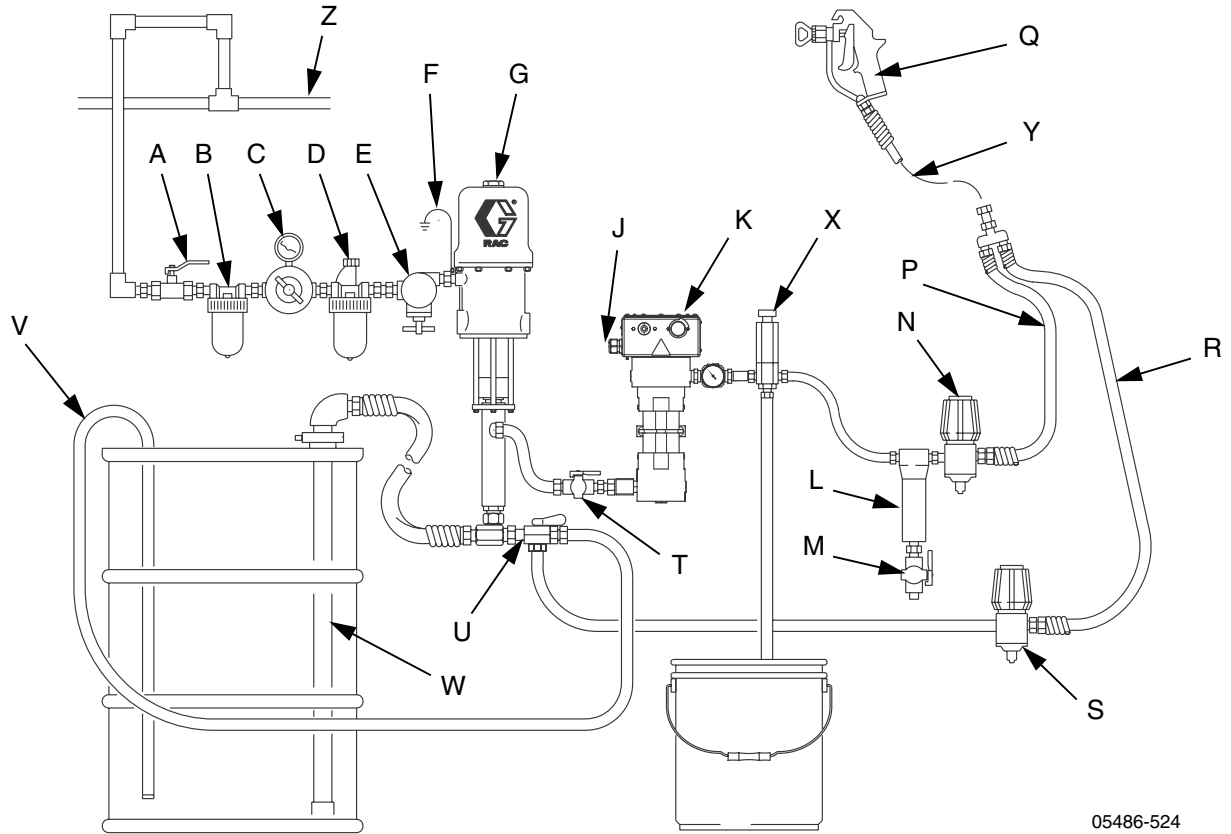


05486-524

Key:

A	Bleed-type Master Air Valve	K	Heater	T	Fluid Shutoff Valve
B	Air Filter	L	Fluid Filter	U	Director Valve
C	Air Regulator and Gauge	M	Drain Valve	V	Drain Back Tube
D	Air Line Lubricator	N	Fluid Pressure Regulator	W	Suction Tube
E	Pump Runaway Valve	P	Fluid Supply Line	X	Pressure Relief Valve
F	Ground Wire	Q	Spray Gun	Y	Whip End Hose
G	Pump	R	Fluid Return Line	Z	Air Supply Line
J	Power Cable (not shown)	S	Back Pressure Valve		

FIG. 1: Typical Installation – Heated Circulating System

Component Identification

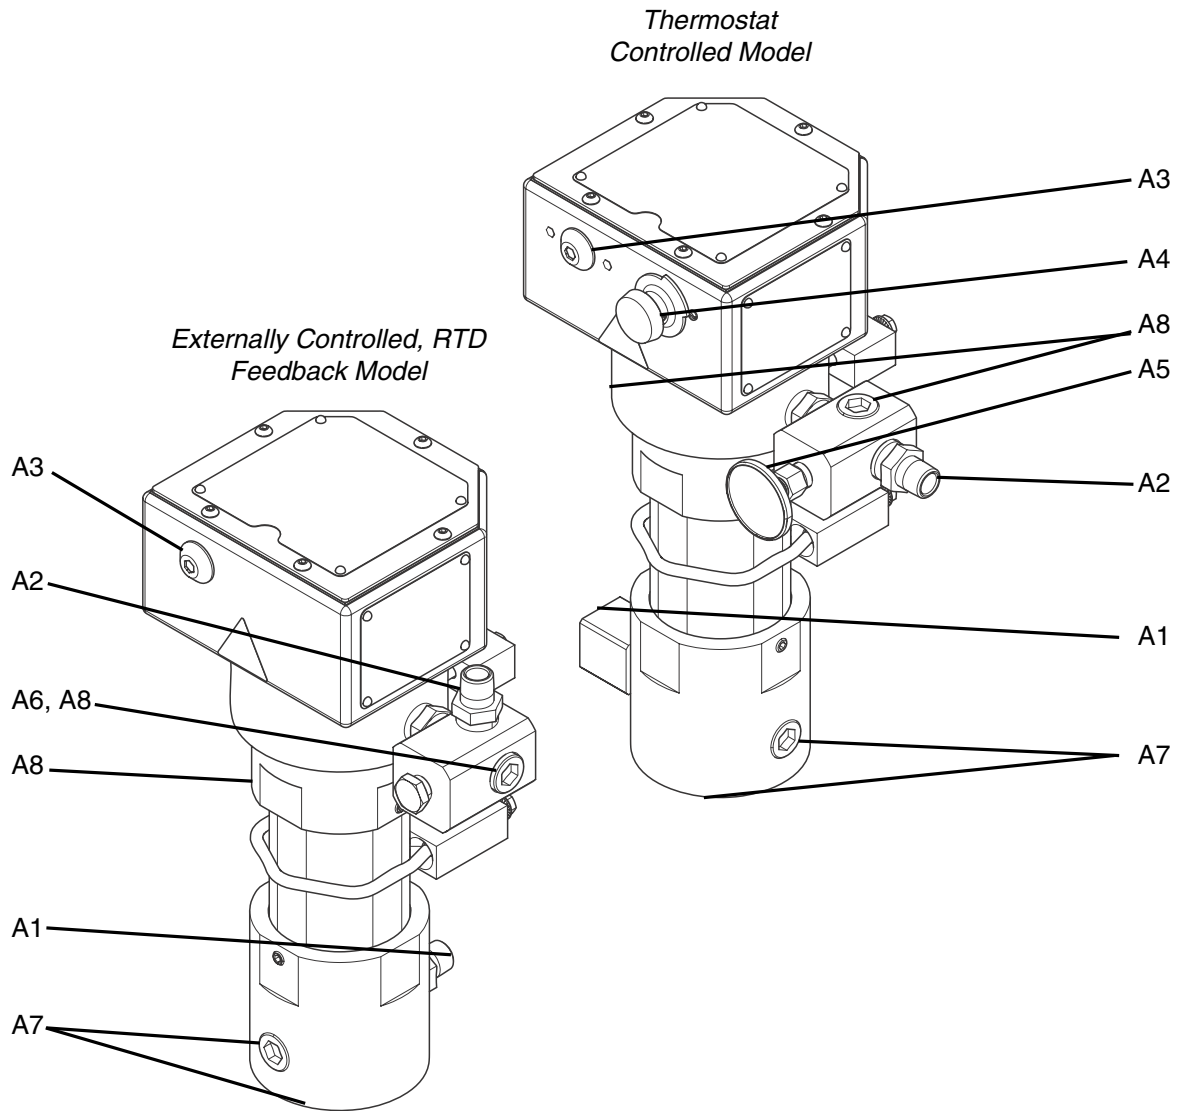

ti20051a

Key:

- A1 Fluid Inlet
- A2 Fluid Outlet
- A3 Heater ON Indicator Light
- A4 Temperature Control Knob (24P016 Only)
- A5 Temperature Gauge (24P016 Only)
- A6 Optional External RTD Feedback Port (262853 Only)
- A7 Optional Inlet Ports (front and bottom)
- A8 Optional Outlet Ports (one on outlet manifold and one on opposite side of heater)

General Information

• Select system components that meet temperature and pressure ratings listed in Technical Data, page 27. The heater's normal output range is adjustable from 84-220°F (29-104°C). • To prevent fire and explosion, locate heater away from all flammable materials and where operators will not come in contact with hot metal surfaces. • To avoid burns, insulate and/or label lines and components exiting heater that may become hot.						

Selecting Tubing

Fluid loses some heat through the tubing or hose between the heater and spray gun. Locate heater close to the spray area to minimize heat loss through plumbing.

The chart in FIG. 2 shows a heat loss curve for 3 common types of tubing.

Chart Notes:

- Higher flow rates have less heat loss.
- Foam-insulated steel tubing and high pressure airless paint hose retain heat best. Insulated tubing and hose are more expensive, but higher costs are commonly offset by lower operating costs.

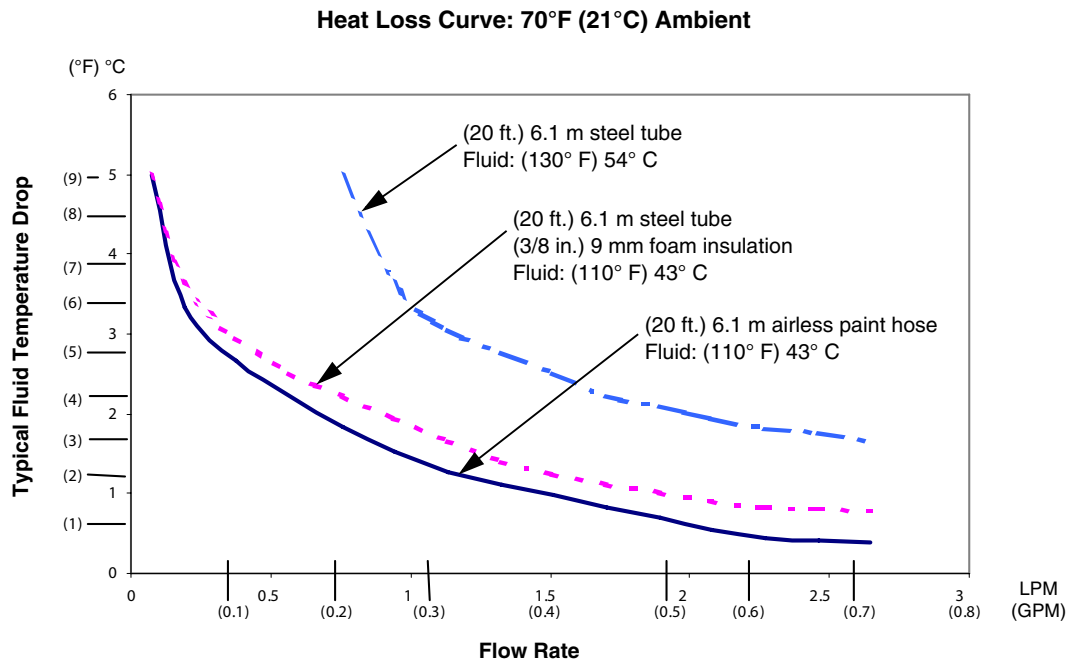


FIG. 2: Typical Temperature Drop

Mounting Heater

NOTE: The Viscon HF heaters will mount anywhere a Viscon HP heater was previously mounted. See the dimensions listed for accessory bracket 192585 on page 26 and the heater dimensions shown on page 29.

NOTE: Heater controls must be easily accessible.

NOTE: The mounting surface must be able to support the weight of the heater and fluid and any stress caused during operation.

Wall Mounting

NOTE: Use wall bracket as a template to mark bolt holes.

Accessory Bracket 192585

(FIG. 3)

1. Use lockwashers and M8 bolts (AA) of appropriate length, not supplied, to mount bracket.
2. Install two screws (74) through spacer block and into top two heater mounting holes until they are about 1/8 in. (3 mm) from fully installed.
3. Lift heater and slide two screw heads into bracket slots.
4. Install u-bracket (78) around heater and install remaining 2 nuts (90). Tighten all nuts and bolts.

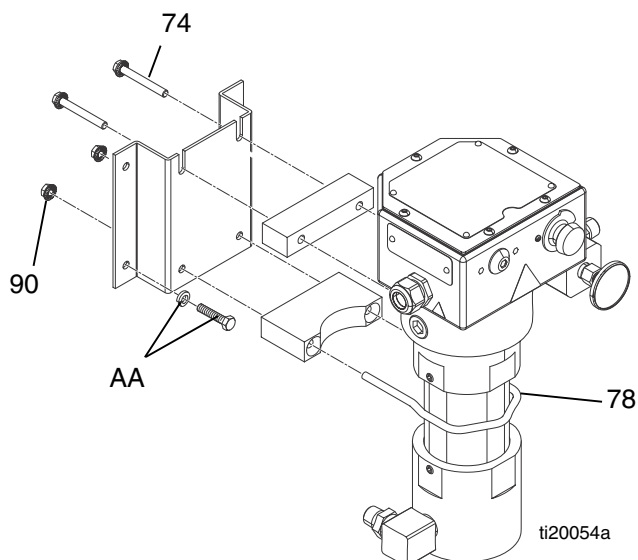


FIG. 3: Accessory Bracket 192585

Cart Mounting

(FIG. 4)

NOTE: For a 2.5 in. square tube frame cart you need to have 2 each of cart mounting bar 183485 (CC) and clamp 183484 (BB). See **Accessories**, page 26, to order.

Place clamps (BB) around the cart vertical post (DD) and secure to the heater mounting bars (CC) with bolts (74) and nuts (90).

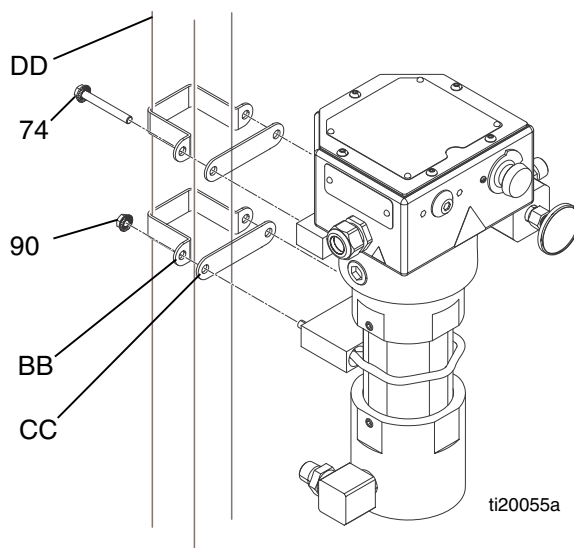


FIG. 4

Fluid Connections and Accessories

(FIG. 5)

1. Install a fluid shutoff valve (T) in the heater's 3/4 in. npt(m) fluid inlet. Do not overtighten. Connect the fluid supply line to the valve.


!	✘					
To prevent serious injury caused by component or equipment rupture: • Never install a shutoff device between the heater and gun as this will trap the heated fluid and not allow for expansion. • Never use a fluid regulator as a shutoff device if it is installed between the heater and gun • Provide a means for adequately handling fluid expansion caused by heat.						

To handle fluid expansion caused by heat:

- Use flexible hoses between heater and gun.
 - Install a properly sized accumulator downstream from the heater.
 - Install a pressure relief valve (X) pre-set to relieve pressure when it exceeds the system maximum working pressure.
2. If feeding an airless spray gun, install a fluid filter (L), drain valve (M), and fluid pressure regulator (N) near the heater's 3/4-14 npt(f) fluid outlet. Then connect the fluid outlet line.

NOTICE

The RTD sensor must always be mounted on the outlet side of housing (67). If you plumb the outlet to the left side, swap position of sensor (88) and plug (82).

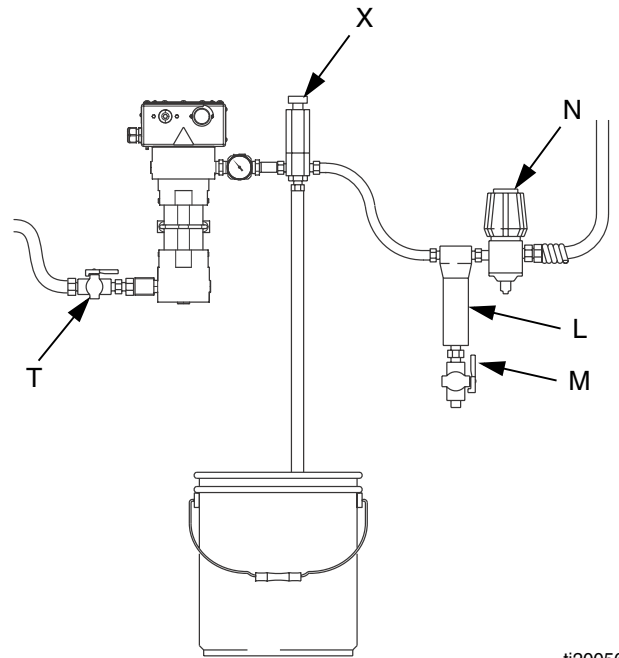

ti20056a

Fig. 5: Fluid Connections and Accessories

Electrical Connections

Heater installation must be in compliance with all applicable local codes and regulations. This equipment must be grounded. Improper grounding, setup, or usage of the system can cause electric shock. All electrical wiring must be done by a qualified electrician and comply with all local codes and regulations.						

NOTICE

To help prevent damage, avoid spilling liquids onto electrical components and never operate with the cover removed or screws missing.

Requirements For All Installations

- The power supply must not exceed heater voltage and amperage. See **Models**, page 2.
- Conductors used for supply connection must be suitable for at least 221°F (105°C). An intermediate Type “e” junction may be required.
- Branch circuit breaker over-current protection must be used. The recommended branch circuit breaker size is 30 amps.
- Connections are made through the strain relief cord grip (87). It will accept cords with an outside diameter of 0.51-0.71 in. (13-18 mm).
- Make your ground connection to the green ground lug inside the control head.
- Make your power connections to the single white and black wires which have loose ends in the control head. Refer to the applicable schematic on page 15.

RTD Temperature Connection

(Model 262853 Only)

A separate smaller cord grip is provided to bring a cable and connector into the M8 4-pin connection inside the heater. Refer to the applicable schematic on page 15 and the **Technical Data** on page 27.

Grounding

The equipment must be grounded to reduce the risk of static sparking and electric shock. Electric or static sparking can cause fumes to ignite or explode. Improper grounding can cause electric shock. Grounding provides an escape wire for the electric current.						


Wire the heater to a properly grounded power supply through the electrical connections and grounding screw (8). In a mobile installation, also ground the truck or trailer to a true earth ground.

Operation

Pressure Relief Procedure



Follow the Pressure Relief Procedure whenever you see this symbol.




This equipment stays pressurized until pressure is manually relieved. To help prevent serious injury from pressurized fluid, such as skin injection, splashing fluid and moving parts, follow the Pressure Relief Procedure when you stop spraying and before cleaning, checking, or servicing the equipment.

Follow **Pressure Relief Procedure** when you stop spraying, and before cleaning, checking, or servicing equipment.

1. Engage the gun trigger lock.
2. Shut off main power to the heater.
3. Circulate fluid for at least 10 minutes to cool the heated fluid and heater.
4. Shut off all air and fluid supplies.
5. Disengage the gun trigger lock.
6. Hold a metal part of the gun firmly to a grounded metal pail, and trigger the gun to relieve pressure.
7. Engage the gun trigger lock.

Initial Flushing



To avoid skin injection, do not point gun at anyone or at any part of the body. To avoid fire and explosion, ensure main power is off and heater is cool before flushing. Do not turn on heater until fluid lines are clear of solvent.

The heater was tested with lightweight oil, which needs to be flushed out before using the equipment. Use a compatible solvent, and follow flushing instructions in your fluid supply and spray gun manual.

Priming System

(Refer to FIG. 1, page 5)

1. Do not turn on the heater yet.
2. If using an airless spray gun, do not install a spray tip yet.
3. Start the pump according to the instructions supplied with it.
4. Turn the system director valve (U) to circulate, and circulate fluid for several minutes.
5. Open the spray gun (Q) at the last outlet to prime the line. Repeat for all gun stations.
6. Engage the gun trigger lock.
7. Shut off the air supply to the pump.
8. Perform **Pressure Relief Procedure**.
9. Install the gun spray tip.

Setting Heater Control

(Refer to FIG. 6)

This procedure applies to model 24P016 only. Heater 262853 with RTD control has no adjustments to make on the heater, it requires use of an external temperature controller.

1. Set the heater control knob (33) to a trial setpoint of 4 or 5.
2. Start the pump and circulate fluid through the system at a very low flow rate of about 10-12 oz/min (0.30-0.35 liter/min).
3. After the indicator light turns off: read the temperature on the thermometer (2). If it does not match the desired temperature, adjust the setpoint.

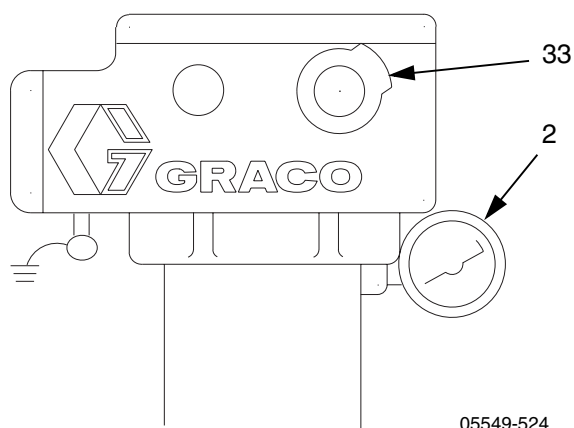


FIG. 6: Setting Heater Control

Adjusting for Spraying

NOTICE

Operating the heater at its highest setting of over 180°F (82°C) for long periods of time decreases the heater life and can cause fluid to dry out which can cause heater clogging and a poor spray pattern.

1. Adjust pump pressure and heater setpoint to the lowest settings needed for good fluid atomization.
2. Set all system back pressure valves (S - FIG. 1 on page 5) to maintain even fluid pressure at all gun stations.

Maintenance


Flushing

						
To avoid fire and explosion, ensure main power is off and heater is cool before flushing. Do not turn on heater until fluid lines are clear of solvent.						

Clogged fluid passages reduce heating efficiency, flow rate, and pressure. Flush or clean whenever a change in heating efficiency, flow rate, or pressure is noticed.


1. Follow **Pressure Relief Procedure**, page 11.
2. Ensure main power is off and heater is cool before flushing. Use a compatible solvent, and follow flushing instructions in your fluid supply and spray gun manual. **Do not turn on heater until fluid lines are clear of solvent.**

Drain the Heater



(FIG. 7)

1. Follow **Pressure Relief Procedure**, page 11.
2. Remove heater inlet and outlet fittings or pipe plugs. Have a container ready to catch the fluid.

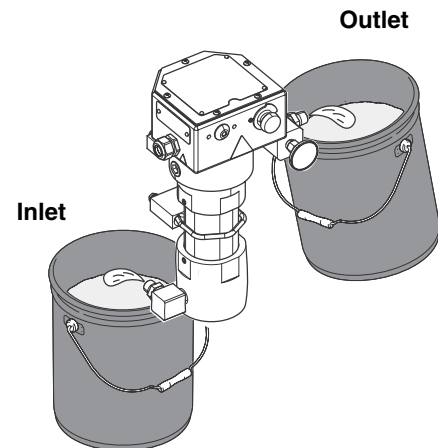

ti20057a

FIG. 7: Drain the Heater

Troubleshooting



Problem	Cause	Solution
Heater will not heat.	No current.	Check circuit and fuses.
	Overtemperature switch (10) tripped.	- Check continuity of overtemperature switch. If circuit is open, press red reset switch and re-check. Determine why switch opened before restarting. <i>Model 24P016 only:</i> check that the thermostat (24) is open when the knob is turned to the left and closed when turned to the right.
	Burned out heater cartridges (81).	Replace cartridges.
Temperature too low.	Fluid requires more warm-up time.	Increase warm-up time.
	Wrong temperature setting.	Adjust setting, page 12.
	Flow rate too high.	Reduce flow rate or use 2 heaters.
	Clogged fluid passages.	Heater Core Removal and Fluid Passage Unclogging , page 19.
	One of the two heater cartridges (81) failed.	Check each cartridge for a resistance of approximately 21 ohms. The pair in parallel should have a resistance of approximately 10.7 ohms. See Heater Cartridges on page 20.
Temperature too high.	Wrong temperature setting.	Adjust setting, page 12.
	Failed primary thermostat (24).	Replace, page 16.
High fluctuating temperatures, about 220-250°F (104-120°C) at 0.1 GPM.	Primary thermostat (24) contacts sticking.	Replace thermostat (24), page 16.
Too much pressure drop or fluid will not flow.	Flow rate too high.	Reduce flow rate or use 2 heaters.
	Clogged fluid passages.	Flush or clean, page 13.
Heater fittings leak.	Loose or damaged fittings.	Tighten or replace fittings.
Heater temperature rises far beyond the setpoint temperature during heating	<i>Model 262853 only:</i> RTD sensor (88) is installed too far into fluid path. Sensor does not sense aluminum core.	Replace sensor (88) and compression fitting (72). See page 21.
	Heater core is dirty or has baked on material.	Disassemble and clean all parts that come in contact with material.

NOTE: See the **Parts** illustration that applies to your heater on page 22 or 24.

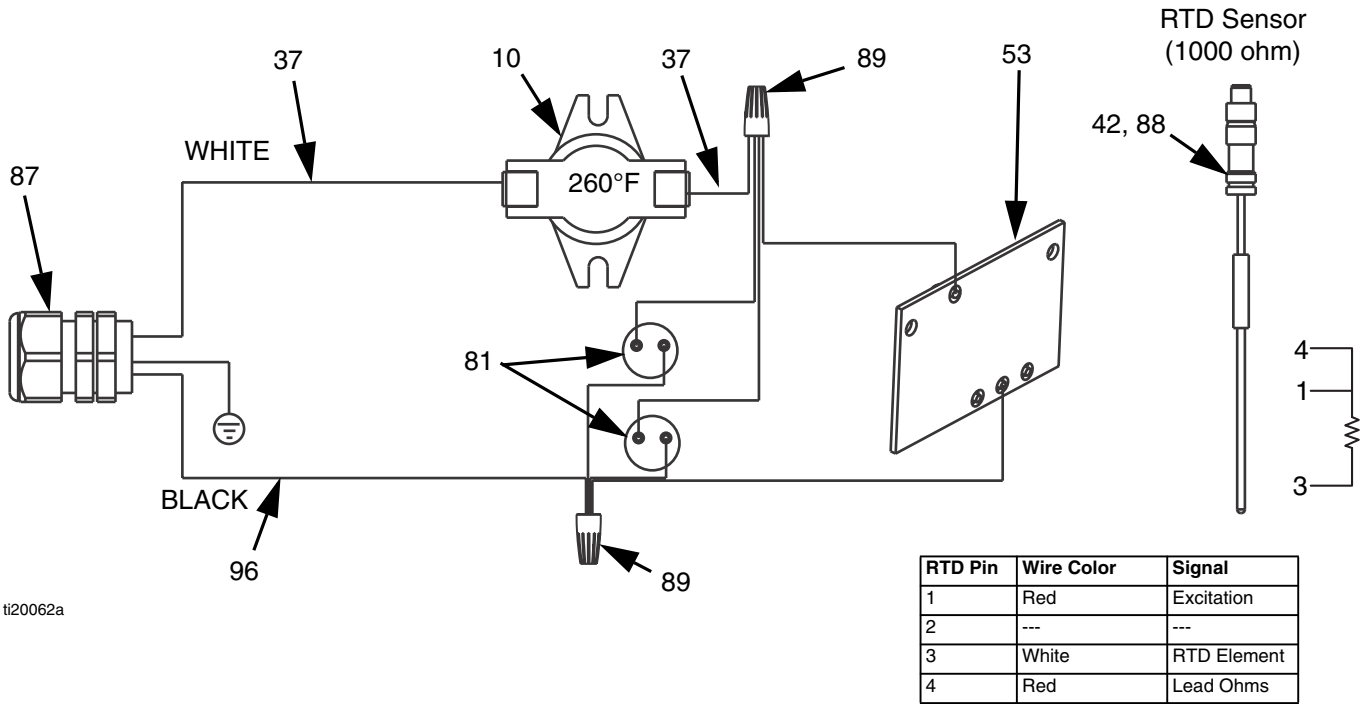


FIG. 8: Electrical Schematic - 262853 Heater with RTD

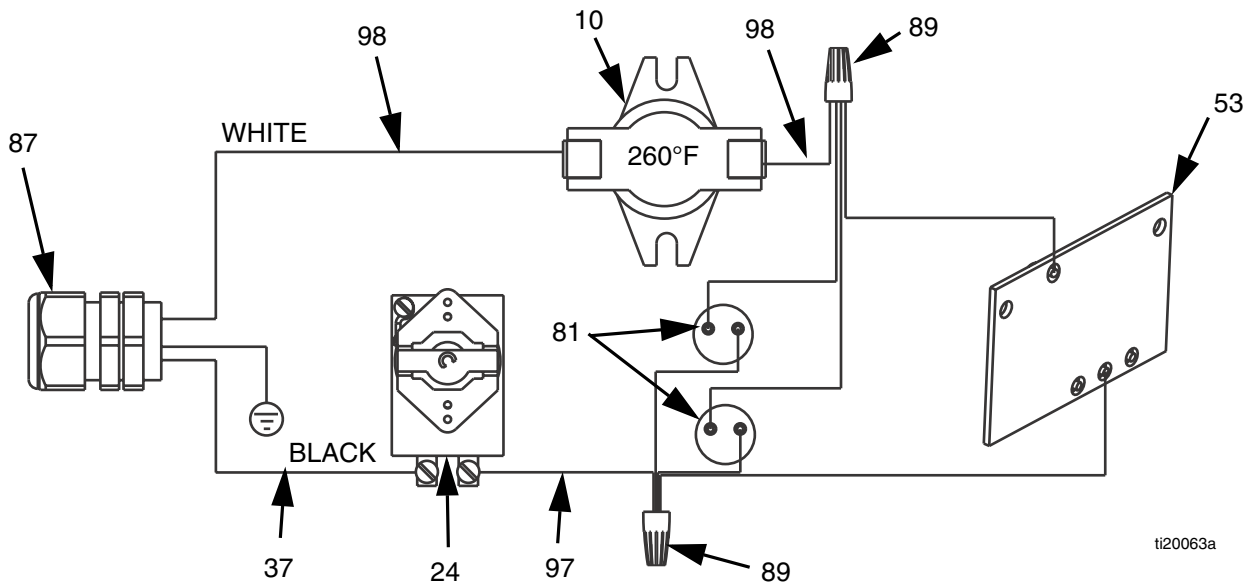


FIG. 9: Electrical Schematic - 24P016 Heater with Thermostat

Repair

To avoid burns, electric shock, and skin injection, make sure the main power is OFF, heater is cool, and pressure is relieved before repairing.						

Primary Thermostat & Probe

(Model 24P016 Only, see FIG. 10 on page 17)

1. Perform **Pressure Relief Procedure**, page 11.
2. Remove screws (52) then remove housing cover (18).
3. Loosen screws (25) that secure thermostat in place.
4. Remove wires from the primary thermostat terminals (FF).
5. Loosen setscrew (26) in switch shaft (28)
6. Pull thermostat probe (EE) out of heater block.
7. Remove thermostat (24) from housing (1).
8. Remove screw standoff (35) with washer (27).
9. Remove bracket from thermostat (24) and secure to new thermostat.

NOTICE

To avoid damaging capillary tube (GG) of the thermostat, which can cause heater malfunction, do not kink or nick the tube.

To avoid shorting out the heater, do not allow capillary tube to contact the terminals on switch (10) or thermostat (24). Follow step 10, below.

10. Liberally apply thermal lubricant (part no. 110009) to probe (EE) of new thermostat (24). Loop capillary tube (GG) several times and wrap the loops with tie strap (42-not shown). Insert probe in the heater block.
11. Continue reassembling in reverse order of disassembly. See the following **Reassembly Notes** section.

Overtemperature Switch

NOTE: This switch is a manual reset type. Press the red button to reset the switch. Check for continuity across the contacts. If the switch tripped, always determine the cause before returning the heater to service.

1. Follow **Pressure Relief Procedure**, page 11.
2. Remove screws (52) then remove housing cover (18).
3. Unplug wires from tabs (HH) on switch.
4. Remove the two screws (16) securing the switch then remove the switch (10).
5. Liberally apply thermal lubricant (part no. 110009) to the bottom of the thermostat switch and reinstall it in reverse order of disassembly.

Reassembly Notes

- Refer to FIG. 8 or FIG. 9 for wiring connections.
- Make sure gasket (47) is installed and aligned with electrical housing screw holes.
- Secure cover (18) with screws (52). Torque screws to 89 in-lb (10 N•m).

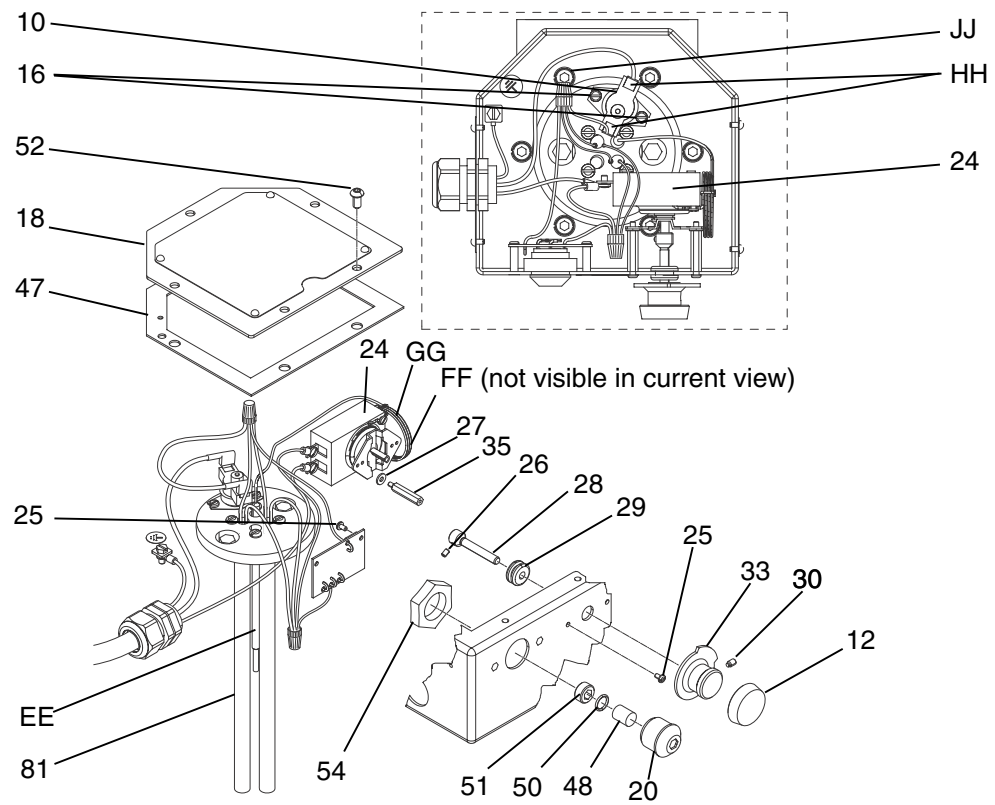


FIG. 10: Thermostat Repair - 24P016

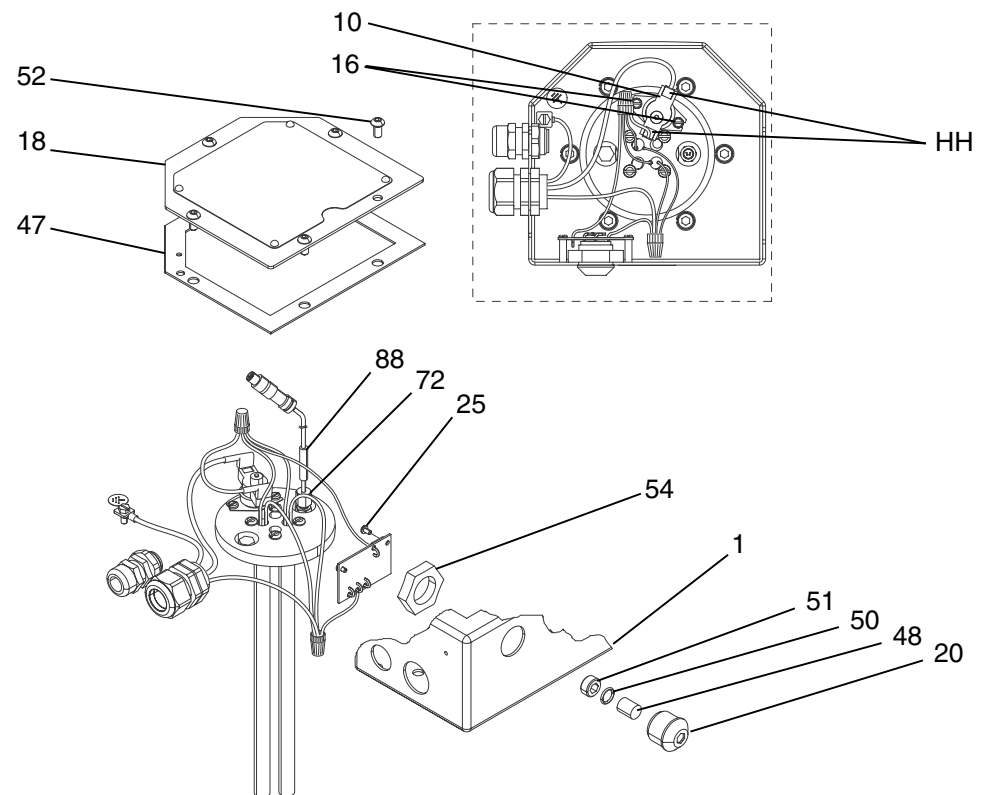


FIG. 11: Sensor Repair - 262853

Control Knob

This procedure applies to heater 24P016 only. See the **Parts** illustration on page 22.

1. Follow **Pressure Relief Procedure**, page 11.
2. Turn control knob (33) to setpoint 1.
3. Loosen the control knob setscrew (30).
4. Remove control knob.
5. Remove adjusting knob (12) from the control knob and press fit it onto the new control knob. Check the grommet (29) and replace if worn.
6. Position new knob so setpoint 1 aligns with the 12 o'clock position and the knob is about 1/16 in. (1 mm) away from the housing. Install and tighten setscrew (30).

Heater Core Removal and Fluid Passage Unclogging

The heater core (68) can be removed for thorough cleaning or replacement. See the **Parts** illustration that applies to your heater on page 22 or 24.

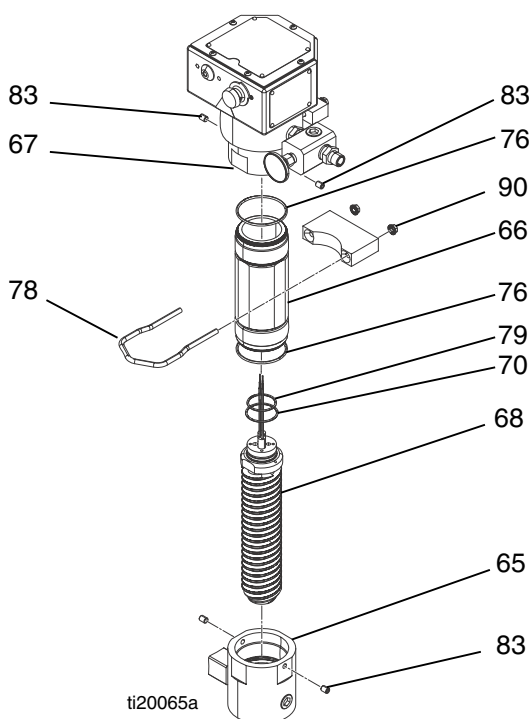


FIG. 12

1. Follow **Pressure Relief Procedure**, page 11.
2. Disconnect power.
3. **Drain the Heater**, page 13.
4. Loosen set screws (83) from bottom inlet housing with a 3/16 in. hex key.
5. Unscrew bottom inlet housing (65).
6. Remove nuts (90) then remove cylinder u-bolt clamp (78).
7. Loosen set screws (83) on upper fluid housing (67).

NOTICE

On model 262853 only, to prevent damaging the RTD sensor (72), do not rotate the core (68) when performing the following step.

8. Unscrew cylinder (66). Pull down to remove.

9. Remove screws (52) then remove cover (18).
10. *On model 262853 only*, remove RTD sensor (88). Loosen nut on compression fitting (72). Pull nut and sensor straight up out of heater.
11. Remove 4 screws (71) from top of plate (69).
12. Disconnect heater cartridge (81) wire leads from wire nuts (89).

NOTICE

To prevent damage to sensors and wiring, do not turn core (68). The core pushes straight down out of housing (67).

13. Pull heater core straight down out of the upper housing (67).
14. Use a wire brush to clean outside fluid passages until bare aluminum is visible.

NOTE: *Model 24P016 Only:* The capillary bulb/tube from the thermostat (24) will slowly pull out of its hole in the core (68). The heater core wires will pull down through plate (69).

Reassembly Notes

- Always replace o-rings (70, 76, and 79).
- Refer to FIG. 10 or FIG. 11 on page 17 for wiring connections.
- *Model 262853 only:* Make sure the core (68) is aligned with the plug (82) pin in housing (67).
- Make sure gasket (47) is installed and aligned with electrical housing screw holes.
- Secure cover (18) with screws (52). Torque screws to 85-90 in-lb (10 N•m).

Heater Cartridges

See **Parts** illustration that applies to your heater on page 22 or 24.

1. Follow **Pressure Relief Procedure**, page 11.
2. Disconnect power.
3. **Drain the Heater**, page 13.
4. Perform **Heater Core Removal and Fluid Passage Unclogging** procedure on page 19. This includes removing the inlet housing (65).
5. With the inlet housing removed, remove 5 screws (52) and cover (18).
6. Disconnect wires from heater cartridges (81).
7. Remove pipe plug (95) and springs (31) from bottom of core (68).
8. Use a 3/8 in. (10 mm) rod to push each cartridge out of the top of the core.
9. Wire new cartridges per FIG. 8 or FIG. 9, page 15.

RTD Sensor and Fitting Replacement

(Model 262853 Only)

1. Follow **Pressure Relief Procedure**, page 11.
2. Disconnect power.
3. Remove screws (52) then remove cover (18).
4. Disconnect M8 cable connection for sensor (88).
5. Loosen nut on compression fitting (72) and pull the sensor (88) straight up and out.
6. Remove compression fitting.

Reassembly

NOTICE

Sensor (88) position cannot be changed once a compression fitting (72) has been tightened. A new sensor (88) and a new compression fitting (72) must be used if the position is wrong.

NOTE: Sensor (88) and fitting (72) must be replaced together.

1. Install new compression fitting (72) into housing (67).

NOTICE

The RTD sensor must always be mounted on the outlet side of housing (67). If you plumb the outlet to the left side, swap position of sensor (88) and plug (82).

2. Position sensor through housing (67) so it sticks through the aluminum shoulder on core (68) 1/16 to

1/8 in. (1.6 to 3.2 mm) into fluid outlet, when looking into the outlet. See FIG. 13.


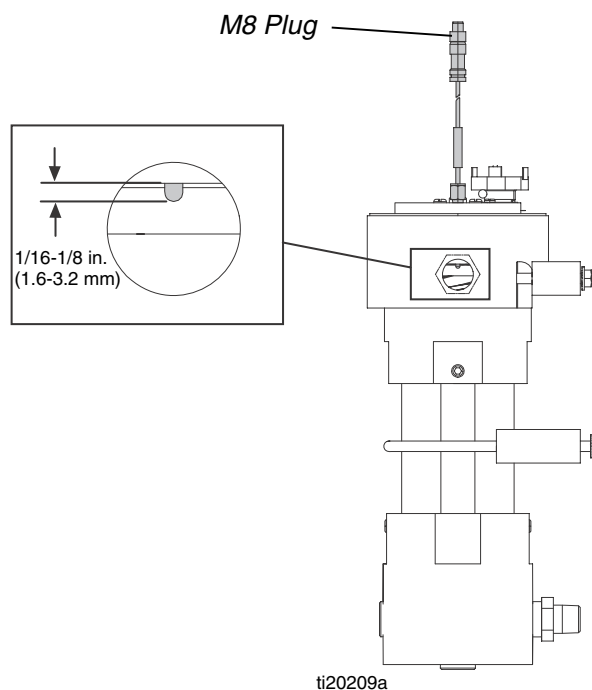


FIG. 13

3. Tighten compression nut on fitting (72) 3/4 turn after it holds sensor tight.
4. Connect M8 plug.
5. Install cover.

Parts

24P016

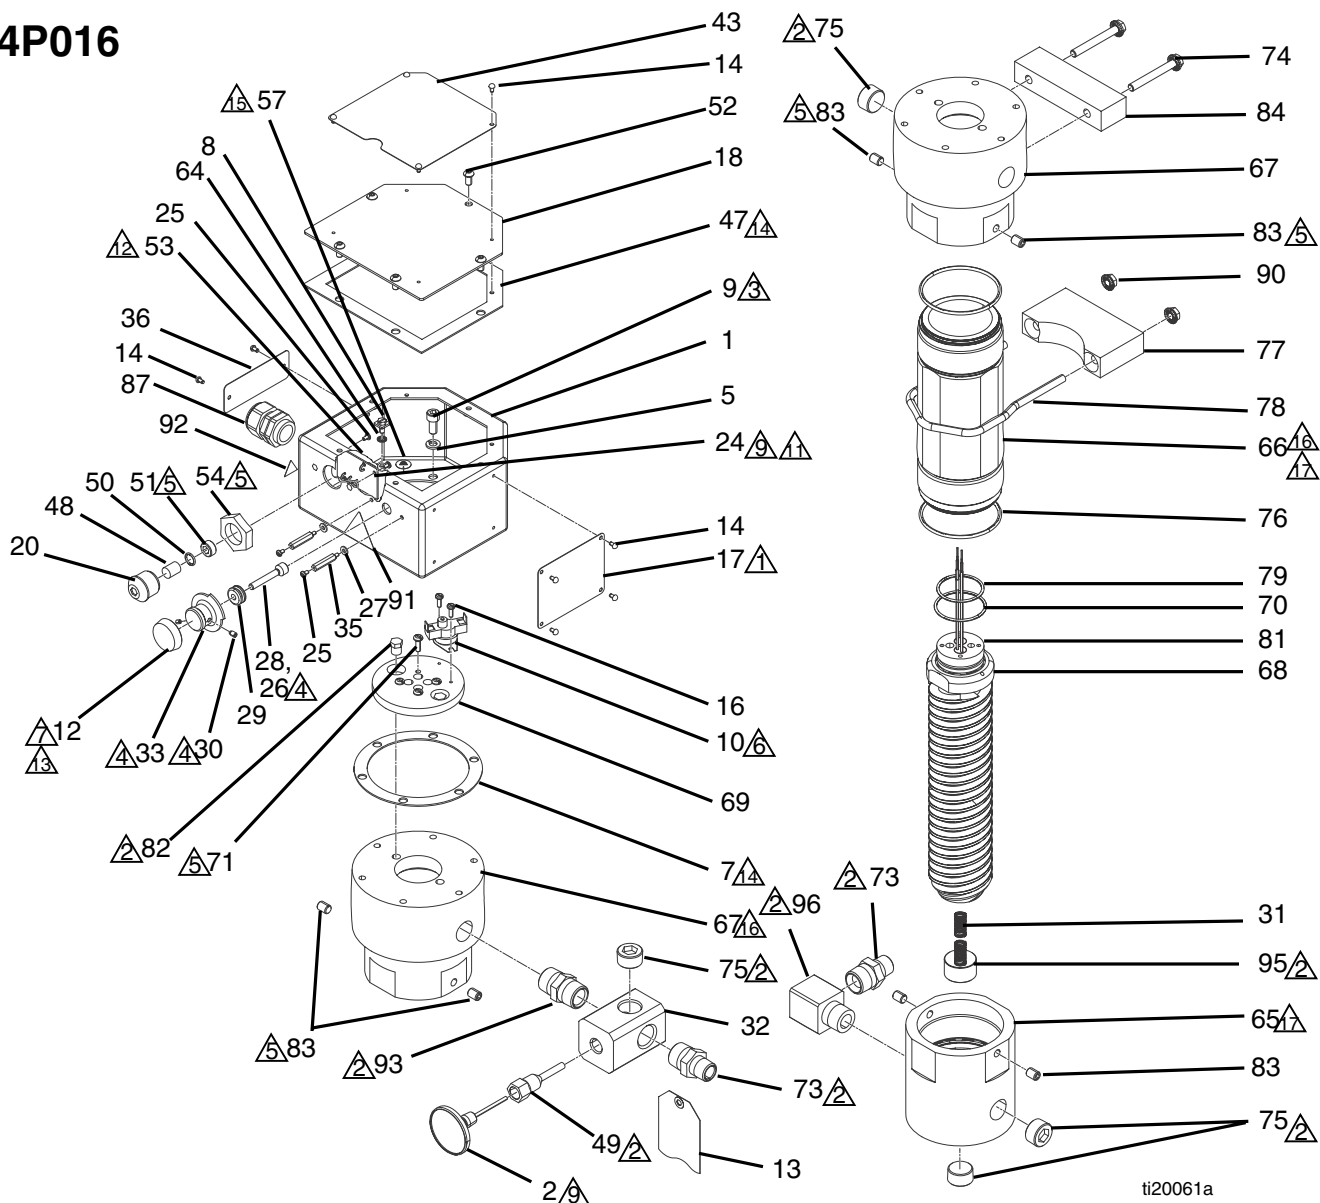

ti20061a

△2 Apply sealant (39) and tape (44).

△3 Torque to 7-11 ft-lb (10-15 N•m).

△4 Loosen setscrew (26). Turn shaft (28) clockwise and re-tighten setscrew (26). Turn shaft counter-clockwise. Install knob (33) with "1" at 12 o'clock position. Tighten knob setscrew (30).

△5 Apply sealant (34).

△6 Apply thermal lubricant (38) to bottom of flange (10).

△7 Press fit onto knob (33).

△9 Apply thermal lubricant (38) completely covering probe before inserting.

△11 Wrap capillary tube of thermostat (24) and attach strap (42). Do not kink or nick tube. Position wrapped capillary tube between thermostat (24) and wall of enclosure (1) maintaining at least 0.6 in. from heating element.

△12 Connect appropriate wire (240V) and terminal end (part of item 53) to heater terminal.

△13 Apply adhesive (56) if required.

△14 Apply spray adhesive as necessary on gasket.

△15 Locate on wall of housing near (8).

△16 Assemble sleeve (66) to housing (67). After bottoming parts together loosen between 0 and 90 degrees to align set screws (83) to sleeve flats (66).


△17 Assemble housing (65) to sleeve (66). After bottoming parts together loosen between 0 and 180 degrees to align set screws (83) to sleeve flats (66).

△18 Cut wires from board.

24P016

Ref	Part	Description	Qty	Ref	Part	Description	Qty
1	---	ENCLOSURE, controls, heater	1	65	24P019	HOUSING, inlet, heater	1
2	102124	THERMOMETER, dial	1	66	24P021	SLEEVE, center, heater	1
5	107542	WASHER, lock, spring	6	67	24P020	HOUSING, outlet, heater	1
7	15A990	GASKET, heater	1	68†	---	CORE, spiral, heater	1
8	116343	SCREW, ground	1	69	16P607	PLATE, mounting, heater	1
9	117367	SCREW, socket head cap, M8 x 18	6	70†	164891	PACKING, o-ring	1
10	24P291	THERMOSTAT SWITCH	1	71†	103374	SCREW, machine, round head	4
12	177969	KNOB, adjusting	1	73	16R883	FITTING, nipple, reducing, 3/4 x 1/2	2
13▲	177922	TAG, warning	1	74	---	SCREW, machine, serrated hex head; 5/16-18 x 2.5 in.	2
14	100055	SCREW, drive, #6	10	75	102726	PLUG, pipe headless, 3/4 in.	4
16	105676	SCREW, machine, pan head	2	76†	126396	PACKING, o-ring, PTFE, 235	2
17	---	LABEL, brand	1	77	16P609	CLAMP, mounting, bottom, heater	1
18	15A810	COVER, heater controls, top	1	78	16P610	CLAMP, u-bolt, heater	1
20	15B828	HOUSING, light, heater	1	79†	102930	PACKING, o-ring	1
24	108676	THERMOSTAT	1	81	16P821	CARTRIDGE, heater, 2700W, 240V	2
25	100032	SCREW, machine, pan head	4	82	556410	PLUG, steel 1/8 pipe hex head	2
26	105672	SCREW, set, socket cap head	1	83	101679	SCREW, set, socket cap	4
27	114027	WASHER, flat	2	84	16P608	CLAMP, mounting, top, heater	1
28	183068	SHAFT, switch	1	87	121603	GRIP, cord, 0.51-0.71, 3/4	1
29	112738	GROMMET	1	89◆	122032	NUT, wire	3
30	101366	SCREW, set, socket cap head	1	90	110996	NUT, hex, flange head	2
31†	16A240	SPRING, compression	2	91▲	189285	LABEL, burn hazard, triangular	1
32	16R930	FITTING, tee, thermometer, 3/4	1	92▲	189930	LABEL, shock hazard, triangular	1
33	177968	KNOB, control	1	93	16R882	FITTING, nipple, 3/4	1
34	---	SEALANT, anaerobic	1	95†	105325	PLUG, pipe	1
35	117526	SPACER, standoff, threaded	2	96	166590	FITTING, elbow, street, high pressure	1
36▲	15B623	LABEL, electric shock warning	1	97	16T515	WIRE, assembly, ring x quick connect	1
37	246346	WIRE, assy	1	98	16T502	WIRE, assembly	1
38†	110009	LUBRICANT, thermal, 1 oz tube	1	--- Not for sale.			
39†	---	SEALANT, pipe, stainless steel	1	▲ Replacement Danger and Warning labels, tags and cards are available at no cost.			
42	---	STRAP, tie wiring	1	◆ Not shown.			
43▲	15B625	LABEL, multiple warnings, English	1	† Parts included in Heater Core (68) Replacement Kit 24P022.			
44	---	TAPE, tfe, sealant	1				
47	15A991	GASKET, heater	1				
48	15B827	LENS, light, glass	1				
49	15D757	HOUSING, thermometer	1				
50	103338	PACKING, o-ring	1				
51	117483	SCREW, jam, socket	1				
52	111962	SCREW, cap, button head	5				
53	246014	BOARD, circuit, heater indicator light assembly	1				
54	106216	NUT, lock	1				
56	---	SEALANT, anaerobic	1				
57▲	172953	LABEL, grounding symbol, round	1				
60▲◆	15B819	LABEL, multiple warnings, multi-language	1				
64	111307	WASHER, lock, external	1				

262853

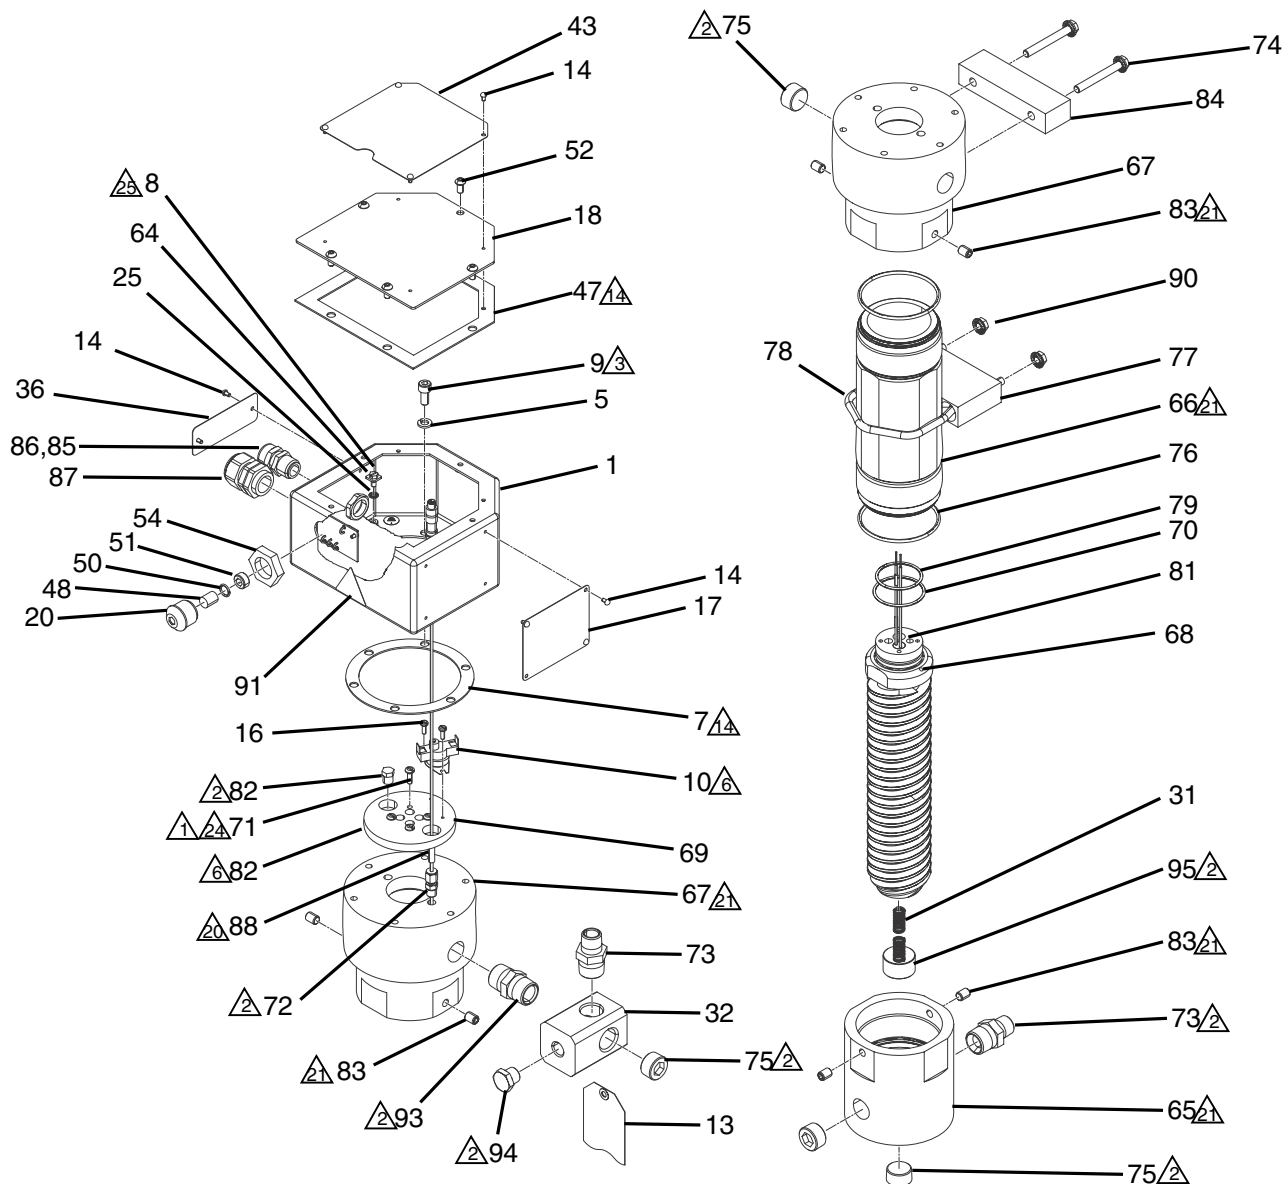

ti20060a

△1 Apply medium strength, thread-locking fluid.

△2 Apply sealant (39) and tape (44).

△3 Torque to 7-11 ft-lb (10-15 N•m).

△6 Apply thermal lubricant (38) to bottom of flange (10) and plate (82) and top of core (68).

△2 Connect appropriate wire (240V) and terminal end (part of item 53) to heater terminal.

△4 Apply spray adhesive as necessary on gasket.

△8 Cut wires from board. Cut ring terminals from white wire and 240V black wire. Strip wire for connection to wire nuts (89).

△9 Power cord is user supplied.

△20 Secure RTD connector (88) with tie strap (42) to RTD stem (88).

△21 Assemble sleeve (66) to housing (67). After bottoming parts together loosen between 0 and 90 degrees to align set screws (83) to sleeve flats (66).

△4 Tighten screws adequately to compress o-ring (70). Plate (69) and core (68) must be tight against each other.


262853

Ref	Part	Description	Qty	Ref	Part	Description	Qty
1	---	ENCLOSURE, controls, heater	1	76†	126396	PACKING, o-ring, PTFE, 235	2
5	107542	WASHER, lock, spring	6	77	16P609	CLAMP, mounting, bottom, heater	1
7	15A990	GASKET, heater	1	78	16P610	CLAMP, u-bolt, heater	1
8	116343	SCREW, ground	1	79†	102930	PACKING, o-ring	1
9	117367	SCREW, shcs, m8x18	6	81	16P821	CARTRIDGE, heater, 2700W, 240V	2
10	24P291	THERMOSTAT SWITCH	1	82	16V591	PLUG, steel locator	1
13▲	177922	TAG, warning	1	83	101679	SCREW, set, socket cap	4
14	100055	SCREW, drive, #6	10	84	16P608	CLAMP, mounting, top, heater	1
16	105676	SCREW, machine, pan head	2	85	260067	FITTING, strain relief, 1/2 npt	1
17	---	LABEL, brand	1	86	117625	NUT, locking	1
18	15A810	COVER, heater controls, top	1	87	121603	GRIP, cord, 0.51-0.71, 3/4	1
20	15B828	HOUSING, light, heater, viscon hp	1	88	126381	SENSOR, RTD, 1k ohm, 4 pin	1
25	100032	SCREW, machine, pan head	2	89◆	122032	NUT, wire	3
31†	16A240	SPRING, compression	2	90	110996	NUT, hex, flange head	2
32	16R930	FITTING, tee, thermometer, 3/4	1	91▲	189285	LABEL, burn hazard, triangular	1
36▲	15B623	LABEL, electric shock warning	1	92▲	189930	LABEL, shock hazard, triangular	1
37	16T502	WIRE, assembly	2	93	16R882	FITTING, nipple, 3/4	1
38†	110009	LUBRICANT, thermal, 1 oz tube	1	94	198292	PLUG, pipe, 3/8 npt	1
39†	---	SEALANT, pipe, stainless steel	1	95†	105325	PLUG, pipe	1
42	---	STRAP, tie wiring	2				
43▲	15B625	LABEL, multiple warnings, English	1			--- Not for sale.	
44	---	TAPE, tfe, sealant	1			▲ Replacement Danger and Warning labels, tags and cards are available at no cost.	
47	15A991	GASKET, heater	1			◆ Not shown.	
48	15B827	LENS, light, glass	1			† Parts included in Heater Core (68) Replacement Kit 24P022.	
50	103338	PACKING, o-ring	1				
51	117483	SCREW, jam, socket	1				
52	111962	SCREW, cap, button head	5				
53	246014	BOARD, circuit, heater indicator light assembly	1				
54	106216	NUT, lock	1				
57▲	172953	LABEL, grounding symbol, round	1				
60▲◆	15B819	LABEL, multiple warnings, multi-language	1				
64	111307	WASHER, lock, external	1				
65	24P019	HOUSING, inlet, heater	1				
66	24P021	SLEEVE, center, heater	1				
67	24P020	HOUSING, outlet, heater	1				
68†	---	CORE, spiral, heater	1				
69	16P607	PLATE, mounting, heater	1				
70†	164891	PACKING, o-ring, PTFE, #135	1				
71†	103374	SCREW, machine, round head	4				
72	126351	FITTING, compression, thermocouple	1				
73	16R883	FITTING, nipple, reducing, 3/4 x 1/2	2				
74	126669	SCREW, machine, serrated hex head; 5/16-18 x 2.5 in.	2				
75	102726	PLUG, pipe headless, 3/4 in.	4				

Accessories

Mounting Bracket

192585

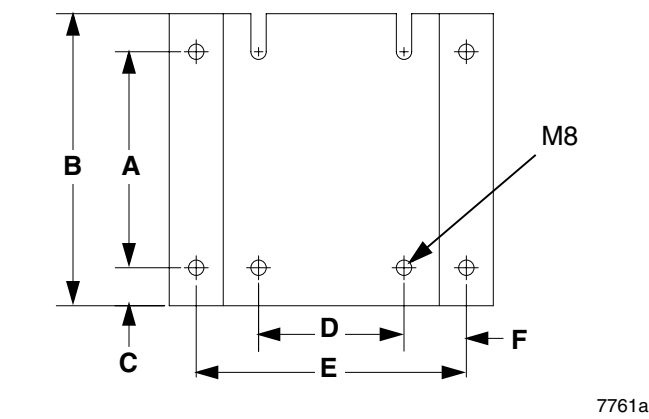

Dimensions – inches (mm)


A	B	C (4x)	D	E	F (2x)
5.0 (127)	6.76 (172)	0.88 (22.4)	3.37 (85.6)	6.25 (158.8)	1.44 (36.6)

Cart Bracket

For mounting heaters to 2.5 in. (63 mm) square tube frames. Order 2 each of the following.

183484: Clamp

183485: Mounting bar

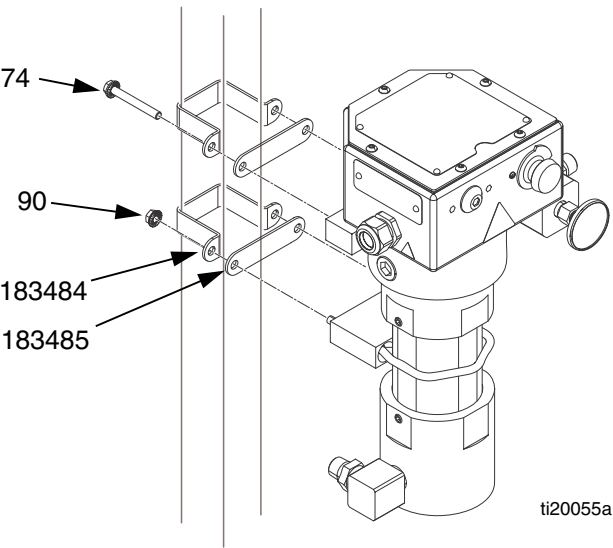

74 & 90 screw and nut included with heater

Thermal Lubricant

110009: 1 fluid ounce tube



Technical Data

The heater can be used in the following environmental conditions: indoor use, 99% maximum relative humidity, pollution degree 2, installation category II, maximum ambient temperature 135° F (57° C).


Maximum Working Pressure	7250 psi (50 MPa, 500 bar)
Voltage / Wattage / Current*	See Models on page 2.
Fluid Passage Heat Transfer Area	210 in. ² (1355 cm ²)
Fluid Passage Dimensions (3 parallel paths)	<i>Height:</i> 0.41 in. <i>Width:</i> 0.32 in. <i>Length:</i> 3 x 48 in.
Fluid Passage Equivalent Diameter.	0.72 in. (18.3 mm)
Thermometer Range	64 - 250°F (18 - 121°C)
Wetted Parts	Stainless Steel, Anodized Aluminum, Electroless Nickel-Plated Steel, PTFE
Temperature Operating Range	84 - 219°F (29 - 104°C)
Weight	51 lb (23.2 kg)
RTD (Model 262853 only)	1000 ohm, class B, 3-wire Connector: M8, 4-pin male

* Main supply fluctuation not to exceed 10%.

Performance Charts

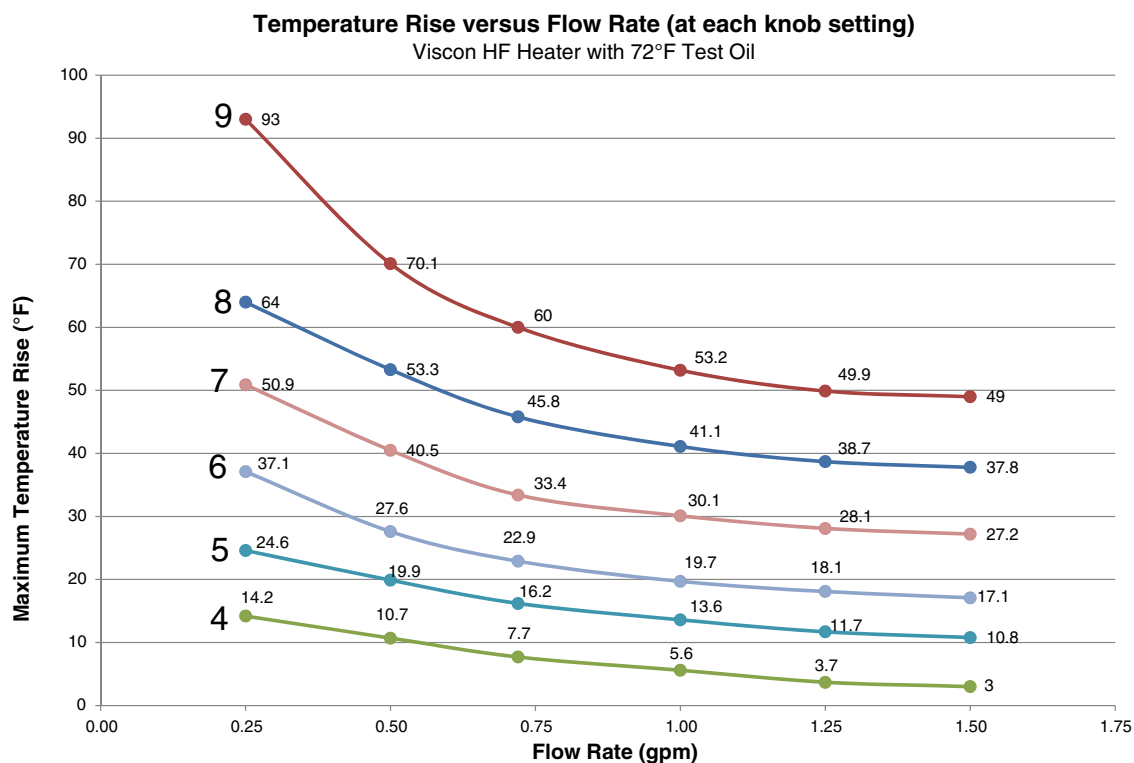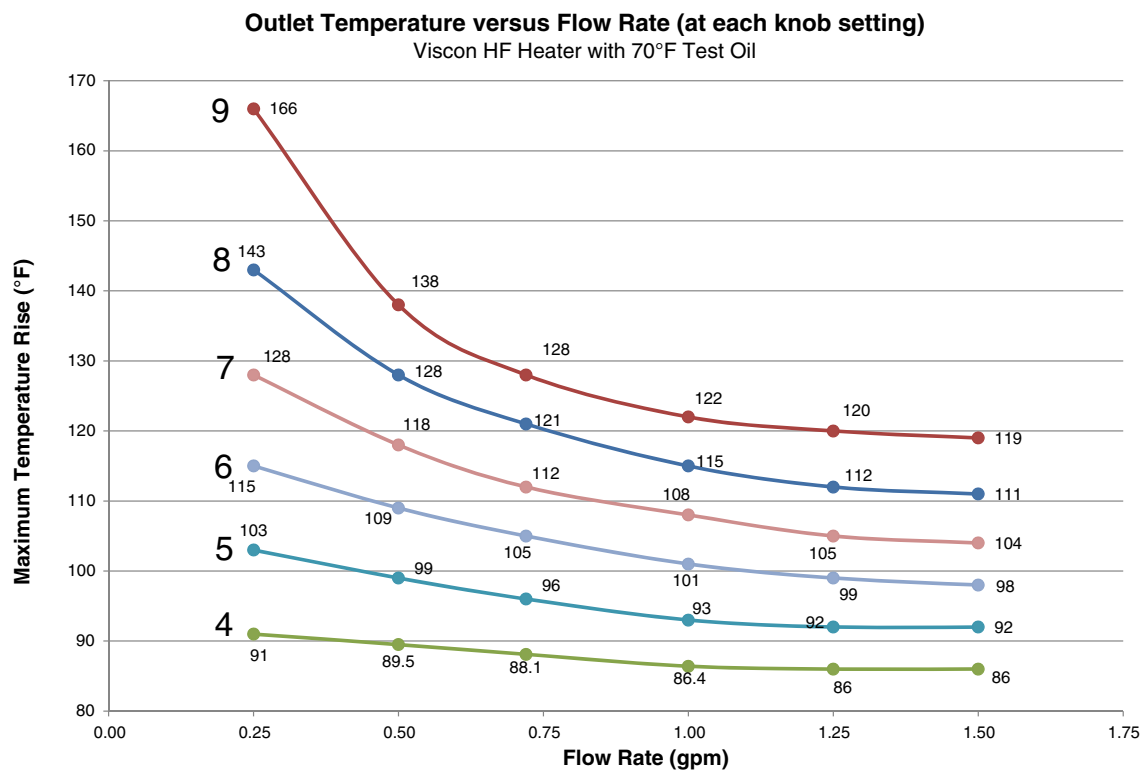

Dimensions

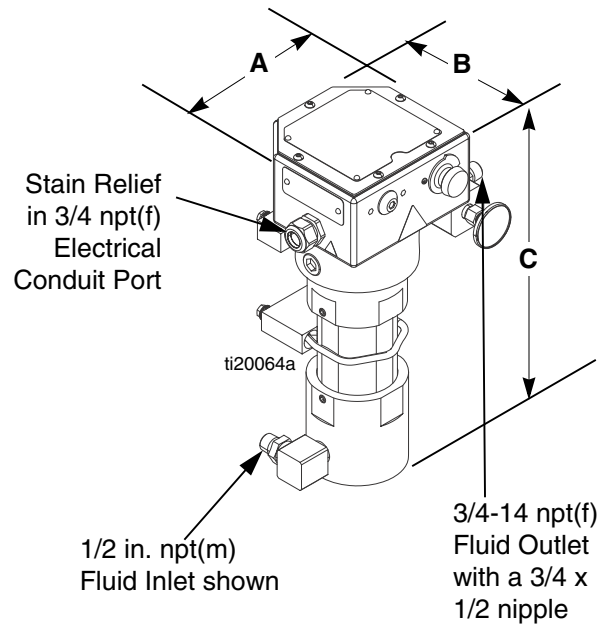

Model 24P016 shown

Measurements – inches (mm)

A	B	C
7.25 (184)	7.0 (178)	17.75 (451)

NOTE:

- 24P016 comes with a 3/4 in. street elbow and a 3/4 x 1/2 inlet nipple.
- 262853 comes with a 3/4 x 1/2 inlet nipple pointing to the back.
- Lower inlet housing can be turned to face the front, back, left, or right.

Graco Standard Warranty

Graco warrants all equipment referenced in this document which is manufactured by Graco and bearing its name to be free from defects in material and workmanship on the date of sale to the original purchaser for use. With the exception of any special, extended, or limited warranty published by Graco, Graco will, for a period of twelve months from the date of sale, repair or replace any part of the equipment determined by Graco to be defective. This warranty applies only when the equipment is installed, operated and maintained in accordance with Graco's written recommendations.

This warranty does not cover, and Graco shall not be liable for general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering, or substitution of non-Graco component parts. Nor shall Graco be liable for malfunction, damage or wear caused by the incompatibility of Graco equipment with structures, accessories, equipment or materials not supplied by Graco, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by Graco.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized Graco distributor for verification of the claimed defect. If the claimed defect is verified, Graco will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the costs of parts, labor, and transportation.

THIS WARRANTY IS EXCLUSIVE, AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Graco's sole obligation and buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought within two (2) years of the date of sale.

GRACO MAKES NO WARRANTY, AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IN CONNECTION WITH ACCESSORIES, EQUIPMENT, MATERIALS OR COMPONENTS SOLD BUT NOT MANUFACTURED BY GRACO. These items sold, but not manufactured by Graco (such as electric motors, switches, hose, etc.), are subject to the warranty, if any, of their manufacturer. Graco will provide purchaser with reasonable assistance in making any claim for breach of these warranties.

In no event will Graco be liable for indirect, incidental, special or consequential damages resulting from Graco supplying equipment hereunder, or the furnishing, performance, or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of Graco, or otherwise.

FOR GRACO CANADA CUSTOMERS

The Parties acknowledge that they have required that the present document, as well as all documents, notices and legal proceedings entered into, given or instituted pursuant hereto or relating directly or indirectly hereto, be drawn up in English. Les parties reconnaissent avoir convenu que la rédaction du présent document sera en Anglais, ainsi que tous documents, avis et procédures judiciaires exécutés, donnés ou intentés, à la suite de ou en rapport, directement ou indirectement, avec les procédures concernées.

Graco Information

For the latest information about Graco products, visit www.graco.com.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6921 **or Toll Free:** 1-800-328-0211 **Fax:** 612-378-3505

*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

For patent information, see www.graco.com/patents.

Original instructions. This manual contains English. MM 3A2954

Graco Headquarters: Minneapolis
International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2012, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com
Revised May 2013